

PH NL 031325	MAT. PCT DOSSIER
-----------------	---------------------

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04N 7/173		A1	(11) International Publication Number: WO 00/33578
			(43) International Publication Date: 8 June 2000 (08.06.00)
(21) International Application Number: PCT/US99/28399		(81) Designated States: AU, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 30 November 1999 (30.11.99)			
(30) Priority Data: 09/201,696 30 November 1998 (30.11.98) US		Published With international search report.	
(71) Applicant: MICROSOFT CORPORATION [US/US]; One Microsoft Way, Building 4, Redmond, WA 98052-6399 (US).			
(72) Inventors: WHITE, Christopher, M.; 2400 Pacific Heights Avenue #709, San Francisco, CA 94115 (US). ANDERSON, David, R.; 21348 Maria Lane, Saratoga, CA 95070 (US).			
(74) Agent: SCOTTI, Robert, F.; Klarquist, Sparkman, Campbell, Leigh & Winston, LLP, One World Trade Center, Suite 1600, 121 SW Salmon Street, Portland, OR 97204 (US).			
(54) Title: METHOD AND SYSTEM FOR PRESENTING TELEVISION PROGRAMMING AND INTERACTIVE ENTERTAINMENT			
(57) Abstract			
<p>An entertainment head-end provides broadcast programming, video-on-demand services, and HTML-based interactive programming through a distribution network to client terminals in subscribers' homes. A number of different features are provided, including novel user interfaces, enhanced video-on-demand controls, a variety of interactive services (personalized news, jukebox, games, celebrity chat), and techniques that combine to provide user experiences evocative of conventional television.</p>			

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**METHOD AND SYSTEM FOR PRESENTING TELEVISION PROGRAMMING AND
INTERACTIVE ENTERTAINMENT**

5 **Background and Summary of the Invention**

The World Wide Web has made available a great deal of "content" to computer users having an internet connection. However, such content is not otherwise available, e.g. to cable television subscribers. Moreover, the content available on the Web is relatively impoverished in production and presentation, as compared with
10 sophisticated television productions familiar to the public.

The present invention seeks to redress various of these failings of the prior art. For example, in one aspect, the invention provides a video entertainment system in which conventional television programming and novel interactive entertainment are presented in an integrated fashion, with the user being able to seamlessly switch from
15 one to the other without a disruptive change in context or in production sophistication. Illustrative interactive entertainment includes channels providing customized news, celebrity chat, games, and jukebox services.

The foregoing and other features and advantages of the present invention will be more readily apparent from the following detailed description, which proceeds with
20 reference to the accompanying drawings.

Brief Description of the Drawings

Fig. 1 is a block diagram of an interactive video system that can be used in accordance with the present invention.

25 Fig. 2 is a block diagram of the entertainment head-end of Fig. 1.

Fig. 3 is a block diagram of a client terminal of Fig. 1.

Fig. 4 is an illustration of a video-on-demand selection screen.

Fig. 5 is an illustration of a user interface permitting a user to control playback of an on-demand video.

30 Fig. 6 is an illustration of a screen display on a NEWS viewer channel.

Fig. 7 is an illustration of a screen display on a CELEBRITY CHAT viewer channel.

Detailed Description

35 Referring to Fig. 1, an exemplary interactive video system 10 includes a entertainment head-end 12 and one or more client terminals 14 intercoupled through a network 16.

The network 16 typically comprises coaxial cable or optical fiber 18, extending from the head-end 12 to distribution nodes 20 within various neighborhoods. From the distribution nodes, further cables 22 couple to individual subscriber premises.

As detailed in the companion application entitled Proxy for Video on Demand Server Control, filed herewith, the network can include one or more proxy servers 24. These are computers interposed between the head-end 12 and the client terminals 14 to perform various system control and user interface (UI) functions.

The proxy server 24 is interposed in a logical TCP/IP control channel 27 between the head-end and clients. While the control signals and the entertainment are physically conveyed on the same cable 18, they are shown separately in Fig. 1 for conceptual clarity.

As shown in Fig. 2, the entertainment head-end 12 includes the components typically associated with a cable television head-end installation, e.g. satellite receivers 26 for receiving satellite broadcasts and producing corresponding baseband analog video signals. Additionally, head-end 12 includes fast digital disk arrays and/or optical storage 28 for storage of MPEG-encoded digital video for on-demand delivery. Head-end 12 also includes one or more interactive services servers 30, which output HTML-based programming (e.g. customized news, celebrity chat, interactive jukebox, and interactive games), as further detailed below. In systems not employing proxy servers 24, the head-end additionally includes a control computer 32 that receives and transmits control data relating to system administration (e.g. channel assignment data, billing information, etc.).

The transmission of these various forms of data from the head-end over the network 16 is straightforward. As is familiar to those skilled in the video arts, the analog video is commonly distributed on 6 MHz channels, beginning at 52 MHz and extending upwardly. The digital video can be encoded on a carrier for transmission within one of these conventional broadcast channels, or can be modulated at one or more other un-used frequencies. Statistical multiplexing is desirably employed to transmit plural channels of digitized video with reduced bandwidth. The HTML-based interactive services and the control data can be transmitted using a conventional protocol (e.g. TCP/IP) and modulated onto a suitable carrier frequency for distribution over the network. Or such data can be transmitted in the vertical blanking interval of analog video broadcasts, as is well known.

After modulation to appropriate distribution frequencies by modulators 34, the various signals from the head-end are combined by an RF combiner 36 for distribution over the network 16.

Each client terminal 14 is an enhanced WebTV terminal that includes a CPU 38, RAM memory 40, non-volatile memory 42, a display screen 44, display driver circuitry 46, a speaker 48 with an associated audio stage 50, a remote control 52, an infrared interface 54, a user interface (UI) 56, a dial-up interface 58, a cable interface 60, and an MPEG decoder 62 (Fig. 3). (The artisan is presumed familiar with WebTV terminals from their many descriptions in the patent and technical literature, and their widespread availability/use.)

The CPU 38 can be any of several microprocessors, e.g. those available from Intel, AMD, Cyrix, Motorola, etc. Alternatively, the CPU can be a custom device that optionally integrates one or more of the other components of terminal 14.

The RAM memory 40 typically comprises 8 or 16K of EDO memory, but more or less memory, and/or memory of differing type, can alternatively be used.

The non-volatile memory 42 in the illustrated embodiment includes a ROM, EEPROM, or flash memory in which certain components of the operating system and applications software are stored. Additionally, the illustrated non-volatile memory 42 includes 4GB of magnetic disk storage.

Display screen 44 is a CRT of the type conventionally used in consumer televisions, and display driver circuitry 46 serves to provide the excitation signals needed by the CRT, in accordance with input video data provided thereto.

Speaker 48 and audio stage 50 are the audio counterparts to the video display screen and driver circuitry. Desirably, these stages comprise high fidelity speakers and a suitable amplifier, together with audio-synthesis circuitry corresponding to the digital data format by which audio data is transmitted. (For the JUKEBOX service, detailed below, the audio may be transmitted in the MPC3 format, in which case the MPEG decoder 62 may be employed for decoding.)

Remote control 52, and corresponding IR interface 54, are generally conventional, and serve to relay user commands to the terminal in accordance with user manipulation of buttons on the remote control 52.

The dial-up interface 58 in the illustrated embodiment is a modem, coupled to a telephone line. Various different modems and communication links can be used.

The cable interface 60 receives composite data signals from the network 16 and separates them into three general signal types: analog video (typically corresponding to broadcast television programming), digital video (typically corresponding to on-demand video programming), and HTML/control instructions (the former typically corresponding to other interactive services, the latter being instructions exchanged between the client terminal 14 and the head-end 12, a proxy server 24, or a neighborhood node 20). Included in the cable interface 60 is an RF

tuner section controlled by the CPU. The illustrated MPEG decoder 62 is an application-specific integrated circuit that converts the MPEG video stream into successive frames of video data.

The user interface 56 in the illustrated embodiment refers to various on-screen visual displays through which -- in conjunction with the remote control 52 -- the user can effect various choices. One of these is switching viewing channels. (As detailed below, switching viewing channels does not necessarily effect a corresponding retuning of the RF tuner portion of the cable interface 60.) Although illustrated separately for clarity, those skilled in the art will understand that the user interface 56 is typically realized as instructions stored in RAM memory 40

The operation of the system is first described with reference to the video-on-demand service. To view an on-demand video, the user first tunes the client terminal 14 to a predetermined channel, the "VIDEO channel."

Here a distinction should be drawn between two types of "channels." The first, termed a "transmission channel," refers to an actual frequency channel (e.g. 52 - 58 MHz) that is used to relay programming from the head-end 12 to the client terminal 14 over the network 16. The second, termed a "viewer channel," refers to the moniker (e.g. MSNBC, CNN, GAME, CHAT, VIDEO, FAVORITES) by which a user distinguishes different programming. The mapping between viewer and transmission channels is determined by the system (e.g. by the terminal 14, the head-end 12, or a proxy server 24).

The VIDEO channel is a viewer channel -- it is the channel to which the viewer switches to receive video on demand programming. The frequency over which this programming is delivered is not important to the viewer. Different transmission channels may be available for use at different times, depending system resource usage (e.g. other viewers' video-on-demand usage). One day the 108-114 MHz transmission channel might be used to relay on-demand video to a subscriber. The next day, the 114-120 MHz transmission channel might be used instead. Data indicating the assignment of transmission channels-to-viewer channels is periodically relayed as control data among the components of the system 10.

On the VIDEO channel, the user is presented an introductory UI screen 64 of the sort shown in Fig. 4. This screen includes four components: a topical listing of movie categories 66; a feature 68 permitting the user to search a database of available videos by title, actor, director, keywords, etc; a promotion 70 of one of more featured video titles; and other advertising 72. This screen is defined by HTML primitives sent over the network 16, as rendered by the client terminal 14. In the illustrated

embodiment, the HTML primitives associated with the video selection screen 64 are sent from the proxy server 24.

The viewer manipulates arrow keys on the remote control 52 to highlight the feature of interest, e.g. a particular topical category. (Highlighting here refers to a visual indicia showing that a particular screen feature, or hyperlink, has been selected for execution. Various forms of highlighting can be used, e.g. a change in color of the feature, a colored box surrounding the feature, etc.) After a desired feature has been selected, a "Go" button on the remote control is pressed, signaling the user's selection to the terminal 14.

If the "KIDS" category was highlighted, the system next presents a screen listing available children's movies (again defined by HTML from the proxy server). Again, the viewer manipulates the remote control to select a particular choice, and then presses "Go." At this point, an optional screen can be presented confirming billing arrangements (if any).

Once a final video selection has been made, a video control panel UI 74 (Fig. 5) is presented on the screen. In the illustrated embodiment, this panel is translucent, permitting the viewer to perceive imagery "behind" the overlaid panel. (That is, the panel is rendered as a change in luminance of the underlying imagery.) The exemplary video control panel 74 of Fig. 5 includes PLAY, STOP, REWIND, FAST FORWARD, and PAUSE buttons 76A-E. (Additionally, the panel can have a textual or graphical indication 78 of the time remaining in the selected video.) The PLAY button is initially highlighted.

While the control panel is being rendered at the client (from HTML primitives stored in the non-volatile memory 42), the head-end queues the selected MPEG video for playback, and the system (either the head-end 12 or a proxy server 24) selects an available transmission channel. Data indicating the selected channel is relayed to the client terminal 14, which tunes the RF tuner in the cable interface 60 without any user action. The viewer channel, in contrast, remains unchanged at the VIDEO channel.

To play the selected video, the user simply presses the "Go" button on the remote control 52, activating the initially-highlighted PLAY button 76A on the control panel 74. A corresponding instruction is sent to the head-end 12, and video delivery commences. The on-screen video control panel 74 disappears.

If, during playback, the user wishes to stop or pause delivery of the on-demand video (e.g. to answer the telephone, or get a snack from the kitchen), a "Menu" button on the remote control is pressed. The video control panel 74 reappears, this time with the STOP button highlighted. If the user wishes to stop playback, the "Go" button on the remote is pressed. If the user wishes to pause playback, the

highlighting on the control panel is moved to the PAUSE button using arrow keys on the remote control, and the "Go" button is then pressed. A corresponding stop or pause instruction is then sent to the head-end 12 from the client terminal 14, interrupting MPEG delivery.

- 5 A data record is stored -- either at the client, at the head-end, or at a proxy server -- indicating the point of video interruption (e.g. by SMPTE code, disk address, time offset, etc.) so that playback can be resumed from that point (or shortly before that point, to provide context).

- When either the STOP or PAUSE button is activated on the panel 74, the panel
10 74 persists on the screen, but the highlighting is switched back to PLAY. (If the PAUSE button is used to resume playback following a pause instruction, and the user activates the PAUSE button to interrupt the video, the highlighting can remain at the PAUSE button.) This arrangement permits the viewer to resume playback simply by pressing "Go" on the remote, since the button that resumes playback is already
15 highlighted. (The panel similarly persists on-screen if the REWIND or FAST FORWARD buttons is activated, with PLAY next highlighted.)

- The screen can be put to various uses while the video is interrupted. Examples include presentation of quizzes and other entertainment to viewers who may still be in the viewing room. An indication of waiting email, or commercial or promotional
20 messages, can similarly be presented.

- If the stop in playback is brief, the system 10 maintains the assignment of the transmission channel to that video on demand client 14, despite the interruption in video delivery. However, if the interruption period exceeds a threshold value (e.g. ten minutes), the system returns the assigned transmission channel back to the system's
25 pool of available transmission channels. The channel may then be assigned to another use. If the user thereafter resumes playback by pressing "Go" on the remote (PLAY was already highlighted), the system responds by dynamically assigning a new transmission channel, retuning the client's RF tuner and the head-end's modulator accordingly, and resuming playback from (or just before) the point of interruption.

- 30 A similar sequence occurs if the user changes to another viewer channel during playback of an on-demand video (e.g. changing to MSNBC to check a sports score). The system interrupts delivery of the on-demand video (e.g. in response to an instruction or notification sent by the client), and a record indicating the point of MPEG interruption is stored. If the user returns to the VIDEO viewer channel within a
35 predetermined period (e.g. 24 hours), the system resumes transmission of the video from the point of interruption. (No user action, e.g. pressing PLAY, is required -- no video control panel is presented in this scenario.) Again, the resumed transmission

may occur over a different transmission channel, but this detail is transparent to the user.

The illustrated system includes an electronic program guide that can be selectively displayed on-screen to facilitate viewer program selection. Electronic program guides are familiar to those skilled in the art, so are not belabored here. Exemplary program guides are shown, e.g., in U.S. Patents and allowed applications 5,815,575, 5,758,258, 5,585,838, 5,654,748, 5,526,036, 08/969,979 and 08/968,386. Desirably, when an on-demand video is selected, the title of the video appears in the electronic program guide, in association with the VIDEO viewer channel. Additionally, an indication of the time-remaining in the selected video can also be displayed, e.g. as a numeric hour:minute representation, or as a block that extends in a gridded program guide for a distance corresponding to the remaining time. (Data specifying the selected video title and the remaining time is stored in one or more of the components of system 10 and can be inserted into the program guide as appropriate.)

This listing of an on-demand video amidst broadcast television programming in an electronic program guide contributes to user perception of on-demand video as just another channel. It is desirable to present all video services in this television-like paradigm so as to present a seamless, familiar experience to new users.

Providing a television-like interaction for on-demand video is one thing; extending that experience to HTML-based video services is another. In the following discussion, several different HTML-based services are described. Various techniques are employed in such services to contribute to a television-like experience.

One technique is to make the screen look like a television screen. Computer displays typically have an image area bounded by straight edges. Since the edge of the CRT tube is typically not straight but is slightly curved, there is commonly a thin black margin at some or all of the edges of computer monitors. The display does not extend into this marginal area lest it render another part of the image off-screen. Television displays, in contrast, are not so concerned with rendering accuracy. Instead, the emphasis is on providing the largest apparent image size. Accordingly, the screen is typically overscanned -- with at least certain scan line ends extending beyond the visible portion of the screen. Accordingly, one technique to yield a more television-like experience when displaying HTML-rendered graphics is to deliberately overscan the screen.

A related technique is to avoid displays that are larger than the viewing screen. Many "pages" on the world wide web require "scrolling" to view portions extending off the bottom of the screen. While this is a familiar operation for web-surfers, it is wholly foreign to television viewers and is desirably avoided.

Another technique for enhancing the television-like appearance of HTML graphics is to employ production techniques and values evocative of television programming. For example, fades, dissolves, and wipes are video transition effects that viewers routinely encounter in television programming. However, they are used rarely -- if at all -- in HTML productions. Their use in the interactive services detailed below contributes to a television-like experience.

Yet another integrating technique is to list the interactive services (e.g. GAMES, CELEBRITY CHAT, JUKEBOX, NEWS) in the system's electronic program guide simply as additional channels, amidst the other channels familiar to viewers (e.g. network broadcast channels and cable channels).

By techniques such as these, viewers encounter interactive video entertainment and conventional television programming in a seamless, familiar context. This is important because, as will be evident from the following discussion, interactive video entertainment itself can be quite different from conventional TV.

Interactive entertainment encompasses a wide range of content. Some forms have antecedents in other contexts or media. Other forms are wholly new. A few examples will serve to illustrate the wide range of possibilities.

A first exemplary interactive video service is a jukebox. When a user first switches to the JUKEBOX viewer channel, a user interface akin to the video selection UI 74 is presented on-screen. However, instead of permitting selection of movies, it permits selection of music (e.g. by genre, artist, title, etc.). Selected music can then be played through the terminal's audio speakers 48 using similar procedures and playback UI as detailed earlier for playback of on-demand video. As before, if the user switches away from the JUKEBOX viewer channel, playback of the selected audio is interrupted and a pointer is stored indicating the point at which the selection should be resumed.

During playback, rather than let the display screen 44 sit idle, it is desirably used in conjunction with the selected music. It may, for example, present a music video to accompany the selected audio recording. Or it may present information related to the selection, e.g. artist biography, critic reviews, listings of other recordings of the same selection by different artists, the artist's upcoming concert schedule, etc. It may also allow the user to purchase the music, whether on CD or otherwise. (All such options can be hot-linked to other screens of HTML data, as is conventional on the world wide web.)

Desirably, the system monitors the user's musical selections, and automatically compiles a profile of the user's preferences (e.g. by genre, artist, etc.). Alternatively, the user can explicitly define his or her preferences. (As with other data stored in

distributed system 10, the user's jukebox preferences can be stored in the client terminal, at a proxy server, or at the head-end, or distributed therebetween.) When the user thereafter returns to the JUKEBOX viewer channel, a selection menu configured to focus on these preferences can be presented. (The focused selection menu also includes the option of returning to the general, all-encompassing music selection screen.)

A second exemplary interactive service is NEWS. This viewer channel delivers personalized news information in a television-like format. The channel is organized like CNN Headline News, with a small number of news categories that are continuously cycled-through several times an hour. Categories can include, e.g., headlines, sports, weather, traffic, and financial. The presentations in each category can be static (e.g. text articles), but more typically include streaming video excerpts.

An exemplary presentation of NEWS is shown in Fig. 6. In addition to showing part of the current Headline category, the screen 80 gives the user the option of switching immediately to any other category (sports, weather, or stocks in the illustrated screen). Again, such selection is made by the user with arrow keys on the remote control, by moving highlighting to the desired choice and pressing the "Go" button.

As with the JUKEBOX channel, the NEWS channel allows the viewer to define and store personal news preferences (e.g. a selected ticker of stock prices, Chicago Cubs news, weather for Chicago, etc.). If local client disk storage permits, all news is downloaded and stored, in a FIFO basis, in disk storage allocated thereto. This locally-stored news is then filtered in accordance with the viewer's preferences for display. This arrangement allows the user to change preferences and apply the new preferences to recently downloaded news.

As in the earlier-described embodiments, state data indicating the status of the NEWS channel can be stored whenever the user switches to another viewer channel, so that the NEWS channel can resume at the point of interruption.

A third illustrated interactive channel is CELEBRITY CHAT. This viewer channel presents different celebrities with which participants can chat in a moderated dialog. The celebrities are scheduled at specific times, much like conventional TV talks shows.

In the illustrated arrangement, viewers compose typed questions on a keyboard optionally provided with the client terminal, and send them e-mail fashion to a moderator of the CELEBRITY CHAT channel. The moderator (human or automated) selects questions of widespread appeal and poses them to the celebrity. The posed questions, and the celebrity's responses, are distributed to all viewers of the CELEBRITY CHAT channel over the cable network. (By this arrangement, the dial-up

- 10 -

telephone link is activated only briefly -- when the user-composed question is emailed to the moderator -- saving dial-up charges.)

A user interface 82 associated with the CELEBRITY CHAT channel is shown in Fig. 7. In this embodiment, the chat is presented in typed form. (In other
5 embodiments, of course, streaming audio/video can be employed to present the moderator and the celebrity in their dialog. This can be supplemented by other textual or multi-media presentations related to the celebrity, e.g. music video, movie clips, biographical data, etc.) At the bottom of the screen is an Ask Question feature 84
10 that can be activated (as before, with arrow keys and the "Go" button on the remote control) to permit entry of the e-mail question in a box 86. After typing the question, the user hits Return on the keyboard. This terminates entry of the question, and activates the dial-up connection through which the question is transmitted to the moderator. After the question has been transmitted, the dial-up link is automatically terminated. If the viewer's question is selected by the moderator, it will eventually
15 appear in the typed transcript of the interview -- together with the celebrity's response.

Due to the involvement of other viewers in the CELEBRITY CHAT channel, it is difficult to suspend the state of the channel if the viewer switches to another channel and later returns. In the illustrated embodiment, a viewer returning to the CELEBRITY
20 CHAT channel sees only the last screenful of question-and-answer dialog.

A fourth interactive channel is GAMES. A viewer tuning to this channel is presented with a menu of game options -- typically topically arranged. Some games are single player. Other games involve a community of players who are participating in the game. The latter are typically scheduled at prearranged times like television
25 programs (e.g. Dungeons and Dragons, 9:00 p.m. every evening).

Contests and tournaments can be conducted on the GAMES channel, with sponsors awarding prizes (e.g. a free month of WebTV) to high-scorers -- either of a single session or over a given period (e.g. a month).

Some games may require execution of software applets on the client terminals,
30 rather than just the rendering of HTML primitives. Such software can be downloaded to the terminal as necessary, or just in advance of scheduled multi-player games. Since some games require relatively large blocks of instructions or data on relatively short notice (depending on the turn of events in the game), same is desirably downloaded in anticipation of likely use, rather than when needed.

35 If the selected game is of the single-player variety, then state data memorializing the status of the game can be stored if the viewer turns to another channel. When the viewer thereafter returns to the GAMES channel, the game can be

resumed at the point of interruption. (Again, due to the involvement of other participants in multi-player games, it is generally impractical to try and permit the viewer to resume an interrupted multi-player game at the point of interruption.)

5 A further feature of the illustrated client terminal is to automatically record favorite broadcast television programs. The client monitors the user's viewing habits to determine favorite shows (e.g. StarTrek Voyager, Wednesdays, 6:00 p.m., viewer channel FOX). Thereafter, if the terminal is not activated by the user to watch one of these favorites, the terminal notices the event and automatically copies the program onto disk, to the extent storage space permits. (MPEG compression -- either software-based, or employing a dedicated MPEG compressor ASIC -- is typically employed.) This
10 stored program is then listed by title and length in the electronic program guide, as available for viewing on the FAVORITES channel. If the viewer switches to this channel, the recorded program is played back automatically. The playback UI of Fig. 5 is selectively presented (e.g. by pressing the Menu button on the remote control) to
15 allow the viewer to control playback. If several favorite programs have been stored, the viewer is first presented with a menu screen on the FAVORITES channel by which the desired program can be selected.

Recorded programs are not deleted after viewing. However, their storage space may be overwritten by other recordings. Recorded programs that have not been
20 viewed are overwritten as needed, oldest first. Viewed programs are overwritten before non-viewed programs. (Programming implementing a variety of more complex rules and policies is typically provided to govern which recorded programs are deleted to provide storage for new programs.)

Video storage at the client terminal also permits a viewer to take a break from
25 broadcast programming without missing anything (as would otherwise occur). When a viewer wants to take a break, a Delay Program button is selected from an Options menu that is controllably presented on the screen in response to a button on the remote control. When the Delay Program button is activated, the then-tuned program is routed to the MPEG compressor and copied to disk. When the viewer thereafter
30 returns, the viewer activates a Resume Program button on the Options menu. Copying of the incoming broadcast continues, but simultaneous playback of the earlier recorded portion commences and is displayed on the screen. The disk thus acts as a circular buffer.

Yet another feature of the illustrated embodiment is an arrangement by which
35 the system can suggest programming that may be enjoyed by different users. The system compiles profiles of each user's viewing habits (e.g. Viewer A's favorite shows appear to be (a) 60 Minutes, (b) StarTrek Voyager, and (c) Dharma and Greg; the

profile includes less-frequently viewed programs as well). Each such profile is correlated with other viewers' profiles to find affinity groupings of users with similar profiles. Viewing suggestions can then be made based on the system's determination of other programming that is popular among other members of the group. For example, from an analysis of the profiles of viewers most closely correlated with Viewer A, the system may note that a significant number also watches Third Rock From the Sun. System records may show that Viewer A has never watched this program and the system may thus propose (either in response to a viewer's query or autonomously) that Viewer A may enjoy Third Rock From the Sun.

Desirably, the profiles are based on more than a single favorite program for each viewer. Although a single favorite program could serve as the basis for affinity grouping, this is generally too clumsy a metric (e.g. many viewers of Seinfeld have otherwise divergent viewing preferences).

The profiles need not be based on favorite programming alone. Many other factors can be considered in forming affinity groupings, e.g. time-of-day viewing habits, zip code, game/chat/interactive news/jukebox preferences/habits, etc.

From the foregoing it will be recognized that the illustrated system redresses many shortcomings of the prior art, and provides a great number of features not previously available.

Having described and illustrated the principles of our invention with reference to a preferred embodiment and various alternatives, it should be apparent that the invention is not limited to the detailed arrangements.

For example, while the disclosure particularly considered use of visual user-interfaces, many of the principles detailed above can be applied equally-well to user interfaces employing other techniques, e.g. gesture-interfaces, audio interfaces, tactile interfaces, etc.

Similarly, while the detailed embodiment employed certain UI conventions (e.g. the video control panel disappears after PLAY is activated), other embodiments can employ other UI conventions (e.g. the control panel persists, or is minimized, or becomes more transparent, etc.)

Several references were made to HTML. This term is meant to include not just Hypertext Markup Language per se, but also to encompass other graphical and/or video representation systems by which primitives can be combined to yield desired static or moving displays.

The illustrated embodiment employed a wired link to the interactive network, but other distribution arrangements (e.g. direct satellite broadcast, with telephone return channel) can likewise be used. Similarly, the dial-up link is not exclusive; other

arrangements (e.g. MetroCOM, etc.) can be used, depending on the needs of the particular application.

Moreover, even a "wired" link to the interactive network needn't be of the sort particularly illustrated. With enhanced compression techniques and delivery
5 technologies, other arrangements -- including plain old telephone service -- can alternatively be employed.

To provide a comprehensive disclosure without unduly lengthening this specification, applicants incorporate by reference the disclosure of patent 5,648,824, which discloses additional details related to video-on-demand systems and related user
10 interfaces.

While the foregoing discussion has detailed a complete system, it employs many inventive concepts -- each of which is believed patentable apart from the system as a whole.

In view of the many different embodiments to which the above-described
15 inventive concepts may be applied, it should be recognized that the detailed embodiments are illustrative only and should not be taken as limiting the scope of our invention. Rather, we claim as our invention all such modifications as come within the scope and spirit of the following claims, and equivalents thereto.

WE CLAIM:

1. A method of presenting video entertainment comprising:
defining plural viewing channels;
on certain of said channels, providing television programs;
5 on at least one of said channels, providing interactive video entertainment, said
interactive video entertainment comprising at least one of the following: interactive
news, interactive celebrity chat, an interactive game, or an interactive jukebox;
wherein a subscriber encounters television programming and interactive video
entertainment in a seamless context.
- 10 2. The method of claim 1 wherein the interactive video entertainment
comprises interactive news.
3. The method of claim 1 wherein the interactive video entertainment
15 comprises interactive celebrity chat.
4. The method of claim 1 wherein the interactive video entertainment
comprises an interactive game.
- 20 5. The method of claim 1 wherein the interactive video entertainment
comprises an interactive jukebox.
6. The method of claim 1 wherein the interactive video entertainment
comprises at least two of the above-listed options.
- 25 7. The method of claim 1 wherein the interactive video entertainment
comprises at least three of the above-listed options.
8. The method of claim 1 wherein the interactive video entertainment
30 comprises all four of the above-listed options.
9. The method of claim 1 wherein the interactive video entertainment also
includes on-demand video.
- 35 10. The method of claim 1 wherein said providing of interactive video
entertainment includes rendering HTML instructions.

11. The method of claim 10 which includes presenting the rendered HTML instructions full-screen on a display device, wherein a television-like context of the video entertainment is not disrupted by a need to scroll up or down the screen to view the entirety of the video entertainment.

5

12. The method of claim 1 which includes composing the interactive video entertainment to include at least one television special effect selected from the group consisting of: dissolves, fades, and wipes, wherein the interactive video entertainment has production values evocative of television programming.

10

13. A method of presenting video entertainment comprising:
defining plural viewing channels;
on certain of said channels, providing television programs;
on at least one of said channels, providing interactive video entertainment
15 defined, at least in part, by HTML instructions, said interactive video entertainment including at least one television special effect selected from the group consisting of: dissolves, fades, and wipes, wherein the interactive video entertainment has production values evocative of television programming.

20

14. The method of claim 13 which includes presenting said interactive video entertainment on a viewing screen, wherein the interactive video entertainment is displayed into an overscan area on the screen, the interactive video entertainment thereby appearing more like television programming.

25

15. The method of claim 13 which includes presenting said interactive video entertainment on a viewing screen, wherein rendering of said HTML instructions yields a full screen display, without the need for user scrolling to view any portion of the display.

30

16. A method of presenting video entertainment comprising:
defining plural viewing channels;
on certain of said channels, providing television programs;
on at least one of said channels, providing interactive video entertainment, said entertainment including HTML primitives to be rendered by a client terminal;
35 when switching away from an interactive video entertainment channel, storing state information associated with said interactive video entertainment channel; and

when thereafter switching back to said interactive video entertainment channel, restoring said state information;

wherein a user can easily resume an earlier-commenced activity on said interactive video entertainment channel.

5

17. The method of claim 16 which includes transmitting the interactive video entertainment on a first transmission channel prior to said switching away, and transmitting the interactive video entertainment on a second, different transmission channel after said switching back.

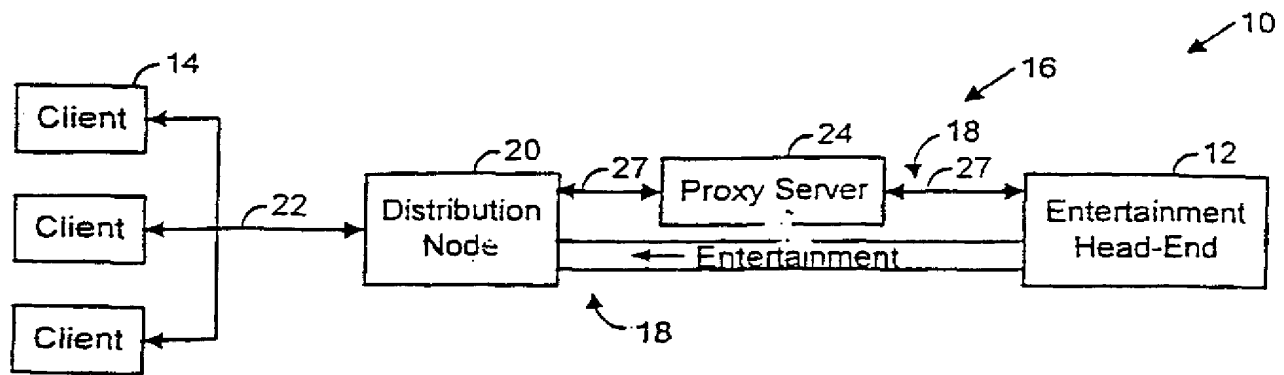


Fig. 1

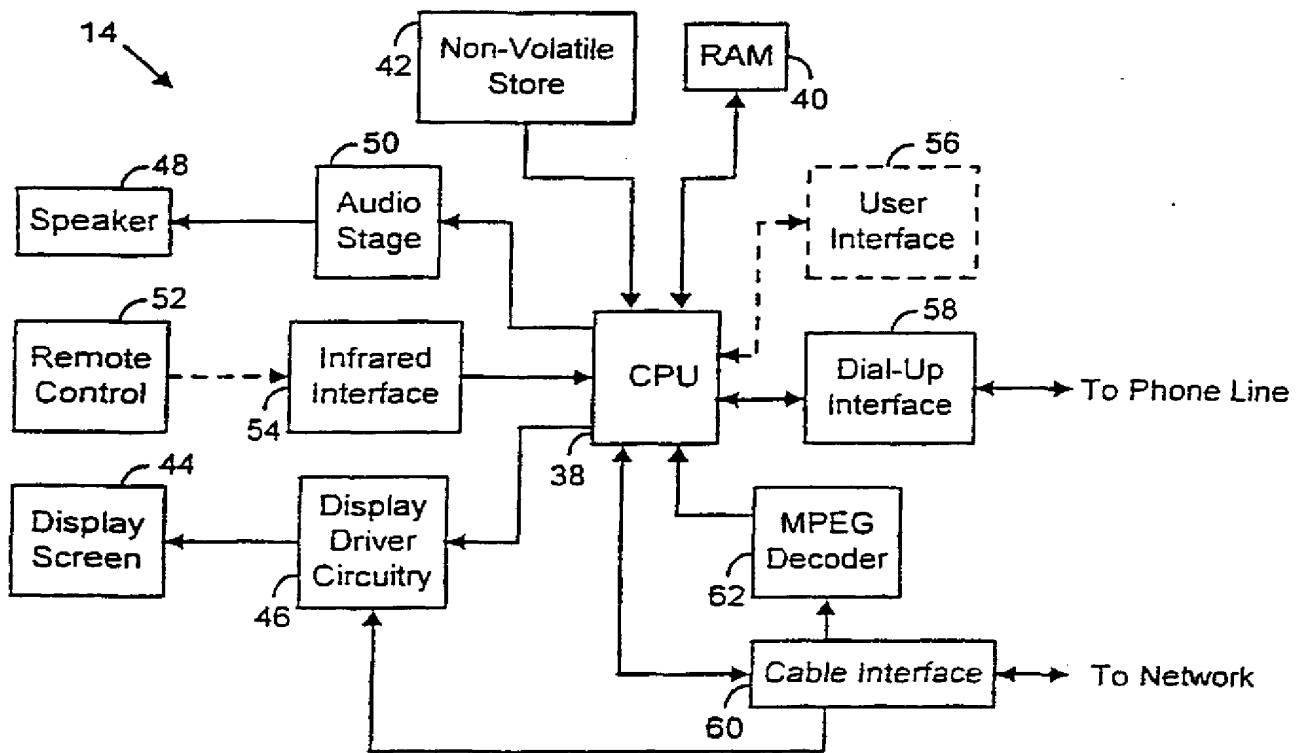
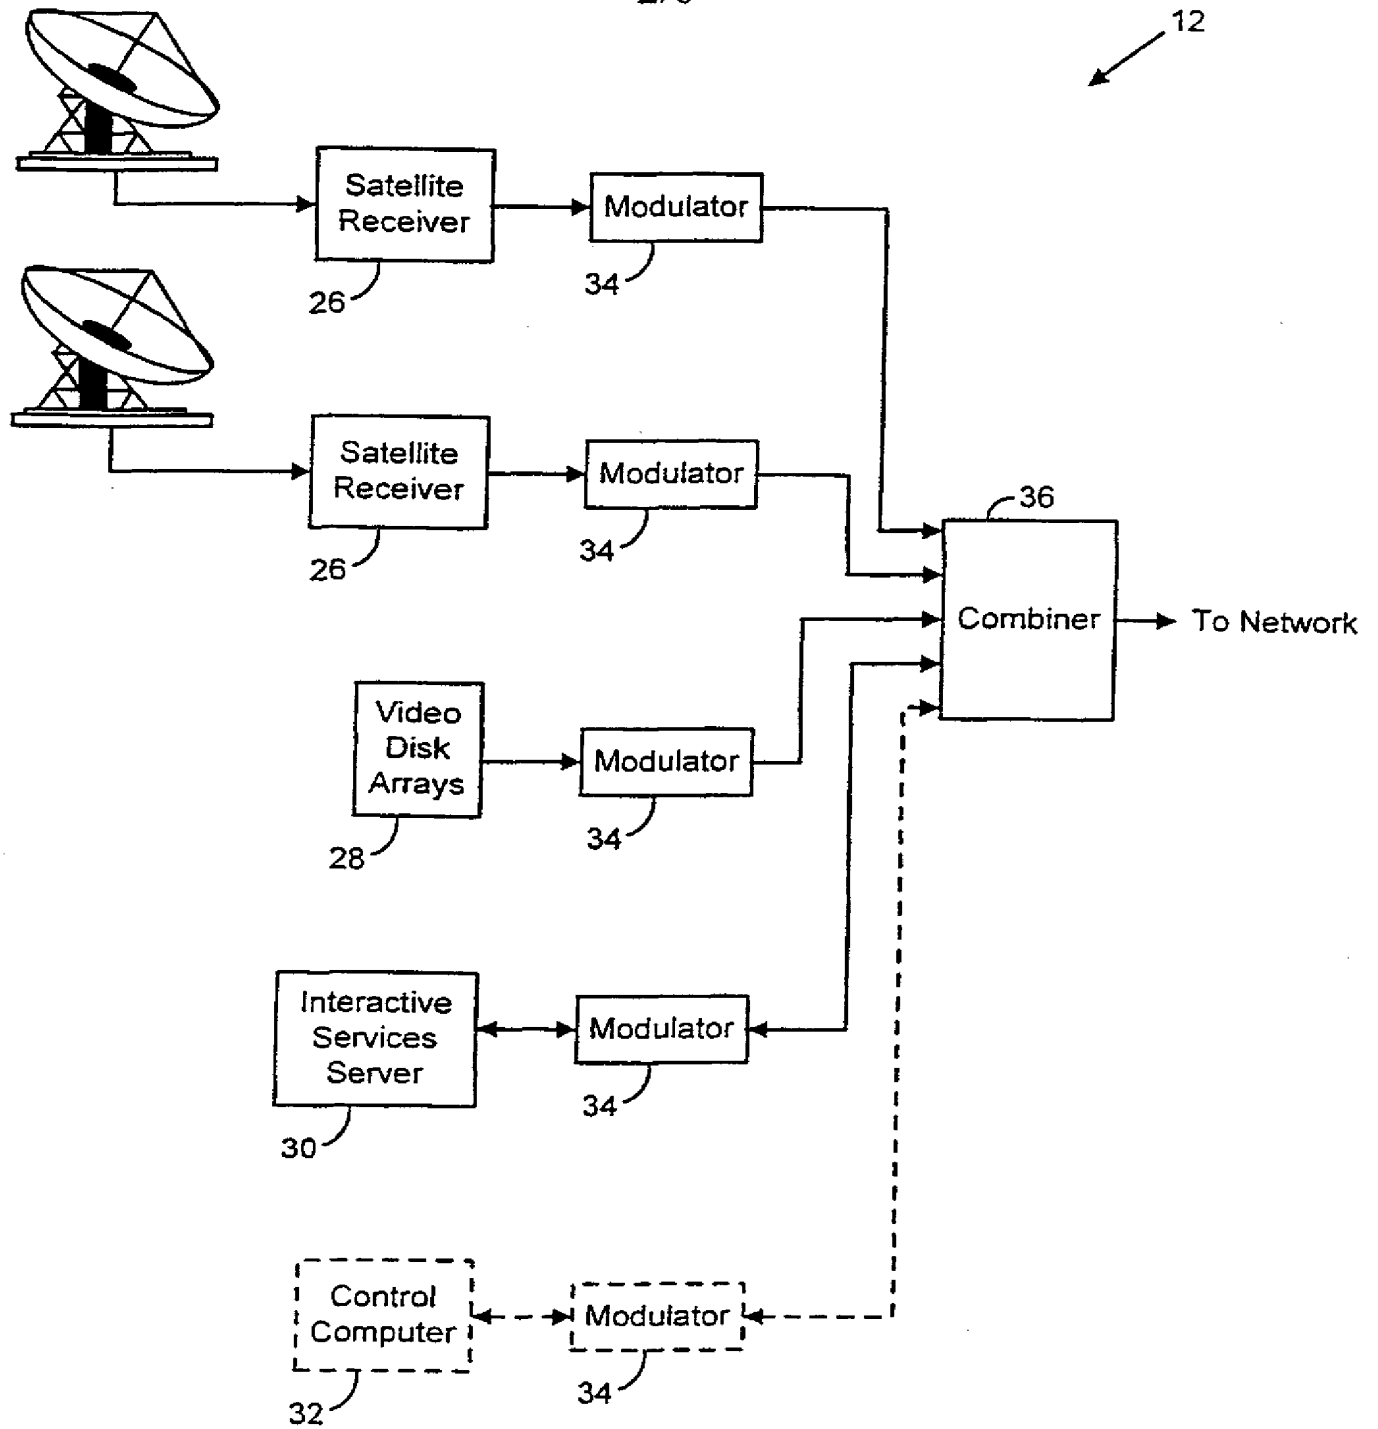


Fig. 3

2/6

**Fig. 2**


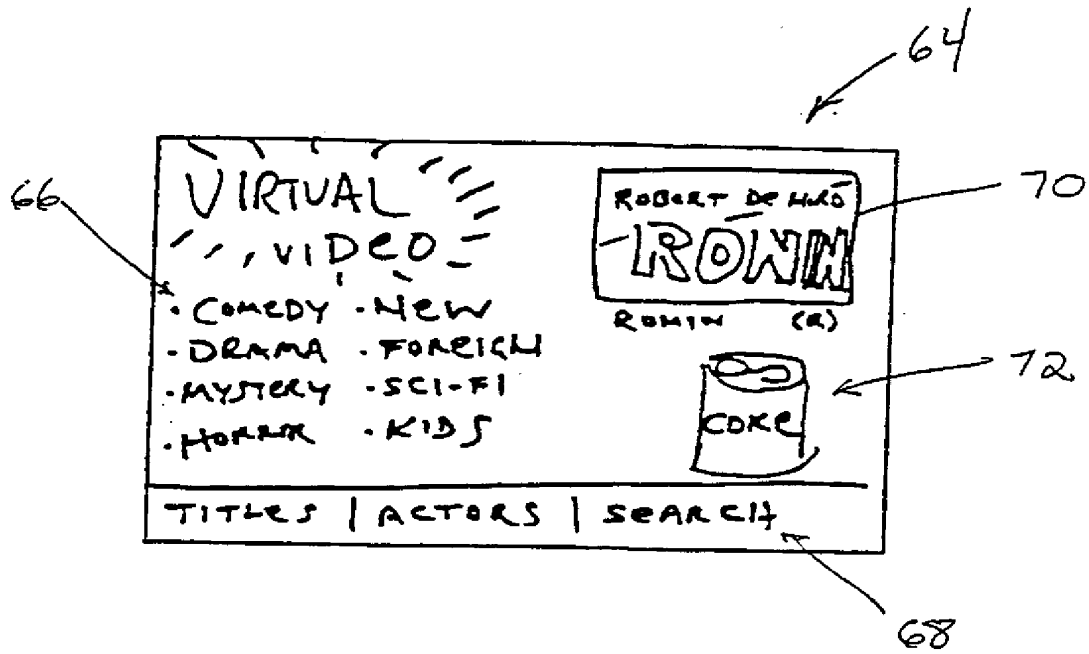


FIG. 4

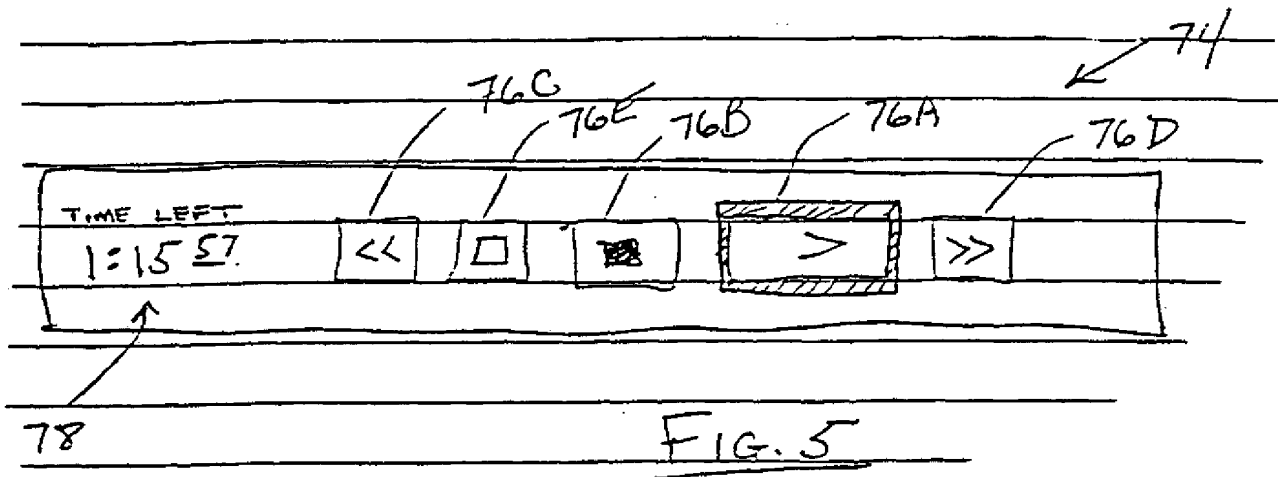

5/6


80
↙


HEADLINES	SPORTS	WEATHER	STOCKS
SUNDAY OCTOBER 11, 1998			
RUSSIA WARNS OF CHAOS FROM NATO ATTACK			HEADLI
MOSCOW (REUTERS) - RUSSIAN FOREIGN MINISTER IGOR IVANOV PLAYS DOWN SUGGESTION THAT A NATO ATTACK ON YUGOSLAVIA COULD RENEW THE COLD WAR.			
SETUP	BACK	MORE	WESTV

FIG. 6

6/6

82

 THE MATERIAL GIRL TALKS BACK	MADONNA: _____
	DOUG B: _____
	MADONNA: _____
	INTERVIEWER: _____
	JOHN H.: _____

	 [Redacted] <u>ARE QUESTIONS</u> CHAT

86

84

FIG. 7

INTERNATIONAL SEARCH REPORT

Intern al Application No

PCT/US 99/28399

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04N7/173

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	US 5 589 945 A (ABECASSIS MAX) 31 December 1996 (1996-12-31) column 3, line 46 -column 6, line 44	1,13,16 2-12,14, 15,17
Y A	WO 92 10040 A (SCIENTIFIC ATLANTA) 11 June 1992 (1992-06-11) page 6, line 21 -page 17, line 8	1,13,16 2-12,14, 15,17
A	US 5 526 035 A (LAPPINGTON JOHN P ET AL) 11 June 1996 (1996-06-11)	1-17
A	WO 96 17467 A (HERZ FREDERICK ;UNGAR LYLE (US); WACHOB DAVID (US); ZHANG JIAN (US) 6 June 1996 (1996-06-06) page 7, line 10 -page 14, line 34 -/-	1-17

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"S" document member of the same patent family

Date of the actual completion of the international search

21 February 2000

Date of mailing of the international search report

28/02/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Greve, M

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No.

PCT/US 99/28399

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5589945 A	31-12-1996	US 5434678 A	18-07-1995
		US 5684918 A	04-11-1997
		US 5664046 A	02-09-1997
		US 5634849 A	03-06-1997
		US 5610653 A	11-03-1997
		US 5953485 A	14-09-1999
		US 5987211 A	16-11-1999
		US 5913013 A	15-06-1999
WO 9210040 A	11-06-1992	US 5239540 A	24-08-1993
		AU 7570294 A	15-12-1994
		AU 650937 B	07-07-1994
		AU 9156991 A	25-06-1992
		CA 2097083 A,C	28-05-1992
		CN 1063006 A,B	22-07-1992
		CN 1117675 A	28-02-1996
		EP 0559831 A	15-09-1993
		FI 932402 A	20-07-1993
		JP 6503214 T	07-04-1994
		US 5406558 A	11-04-1995
		US 5455570 A	03-10-1995
		US 5675575 A	07-10-1997
		US 5282028 A	25-01-1994
		US 5287351 A	15-02-1994
US 5526035 A	11-06-1996	US 5343239 A	30-08-1994
		AU 661082 B	13-07-1995
		AU 3063292 A	15-06-1993
		CA 2124000 A	27-05-1993
		EP 0613600 A	07-09-1994
		JP 7505020 T	01-06-1995
		WO 9310605 A	27-05-1993
		US 5734413 A	31-03-1998
		US 5519433 A	21-05-1996
		US 5764275 A	09-06-1998
		US 5638113 A	10-06-1997
WO 9617467 A	06-06-1996	US 5758257 A	26-05-1998
		AU 703247 B	25-03-1999
		AU 4410396 A	19-06-1996
		CA 2207868 A	06-06-1996
		EP 0796538 A	24-09-1997
		US 6020883 A	01-02-2000
		US 5734720 A	31-03-1998
		US 5754938 A	19-05-1998
		US 5754939 A	19-05-1998
		US 5835087 A	10-11-1998
US 5619249 A	08-04-1997	AU 685320 B	15-01-1998
		AU 3551695 A	29-03-1996
		CA 2199153 A	21-03-1996
		DE 69506571 D	21-01-1999
		DE 69506571 T	12-05-1999
		EP 0781489 A	02-07-1997
		ES 2126317 T	16-03-1999
		JP 10505976 T	09-06-1998
		WO 9608927 A	21-03-1996

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 99/28399

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0852443	A	08-07-1998	JP 10271484 A	09-10-1998
			SG 67468 A	21-09-1999
US 5550578	A	27-08-1996	US 5526034 A	11-06-1996
			US 5412720 A	02-05-1995
			US 5220420 A	15-06-1993
			US 5093718 A	03-03-1992
			US 5594507 A	14-01-1997
			US 5442700 A	15-08-1995
			US 5485197 A	16-01-1996
			US 5557316 A	17-09-1996
			US 5587734 A	24-12-1996
			US 5883661 A	16-03-1999
			EP 0638219 A	15-02-1995
			JP 7509817 T	26-10-1996
			WO 9322877 A	11-11-1993
			AU 643828 B	25-11-1993
			AU 8483891 A	02-04-1992
			CA 2052477 A,C	29-03-1992
			CN 1063593 A	12-08-1992
			CS 9102869 A	13-05-1992
			EP 0477786 A	01-04-1992
			FI 914552 A	29-03-1992
			HU 63287 A	28-07-1993
			IL 99586 A	22-02-1998
			JP 6022315 A	28-01-1994
			MX 9101308 A	04-05-1992
			NO 913772 A	30-03-1992
			NZ 239969 A	22-12-1994
			PL 291975 A	05-04-1993
			PT 99110 A	31-12-1993
			TR 25669 A	01-07-1995
			US 5361091 A	01-11-1994
			US 5319455 A	07-06-1993
			ZA 9107555 A	28-04-1993
US 5534941	A	09-07-1996	NONE	

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 June 2000 (08.06.2000)

PCT

(10) International Publication Number
WO 00/33578 A1

- (51) International Patent Classification⁷: H04N 7/173
- (21) International Application Number: PCT/US99/28399
- (22) International Filing Date:
30 November 1999 (30.11.1999)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/201,696 30 November 1998 (30.11.1998) US
- (71) Applicant: MICROSOFT CORPORATION [US/US];
One Microsoft Way, Building 4, Redmond, WA 98052-6399 (US).
- (72) Inventors: WHITE, Christopher, M.; 2400 Pacific Heights Avenue #709, San Francisco, CA 94115 (US).
ANDERSON, David, R.; 21348 Maria Lane, Saratoga, CA 95070 (US).
- (74) Agent: SCOTTI, Robert, F.; Klarquist, Sparkman, Campbell, Leigh & Whinston, LLP, One World Trade Center, Suite 1600, 121 SW Salmon Street, Portland, OR 97204 (US).
- (81) Designated States (*national*): AU, JP.
- (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
- Published:
— with international search report
- (48) Date of publication of this corrected version:
1 November 2001
- (15) Information about Correction:
see PCT Gazette No. 44/2001 of 1 November 2001, Section II
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: METHOD AND SYSTEM FOR PRESENTING TELEVISION PROGRAMMING AND INTERACTIVE ENTERTAINMENT

(57) Abstract: An entertainment head-end provides broadcast programming, video-on-demand services, and HTML-based interactive programming through a distribution network to client terminals in subscribers' homes. A number of different features are provided, including novel user interfaces, enhanced video-on-demand controls, a variety of interactive services (personalized news, jukebox, games, celebrity chat), and techniques that combine to provide user experiences evocative of conventional television.

**METHOD AND SYSTEM FOR PRESENTING TELEVISION PROGRAMMING AND
INTERACTIVE ENTERTAINMENT**

5 **Background and Summary of the Invention**

 The World Wide Web has made available a great deal of "content" to computer users having an internet connection. However, such content is not otherwise available, e.g. to cable television subscribers. Moreover, the content available on the Web is relatively impoverished in production and presentation, as compared with
10 sophisticated television productions familiar to the public.

 The present invention seeks to redress various of these failings of the prior art. For example, in one aspect, the invention provides a video entertainment system in which conventional television programming and novel interactive entertainment are presented in an integrated fashion, with the user being able to seamlessly switch from
15 one to the other without a disruptive change in context or in production sophistication. Illustrative interactive entertainment includes channels providing customized news, celebrity chat, games, and jukebox services.

 The foregoing and other features and advantages of the present invention will be more readily apparent from the following detailed description, which proceeds with
20 reference to the accompanying drawings.

Brief Description of the Drawings

 Fig. 1 is a block diagram of an interactive video system that can be used in accordance with the present invention.

25 Fig. 2 is a block diagram of the entertainment head-end of Fig. 1.

 Fig. 3 is a block diagram of a client terminal of Fig. 1.

 Fig. 4 is an illustration of a video-on-demand selection screen.

 Fig. 5 is an illustration of a user interface permitting a user to control playback of an on-demand video.

30 Fig. 6 is an illustration of a screen display on a NEWS viewer channel.

 Fig. 7 is an illustration of a screen display on a CELEBRITY CHAT viewer channel.

Detailed Description

35 Referring to Fig. 1, an exemplary interactive video system 10 includes a entertainment head-end 12 and one or more client terminals 14 intercoupled through a network 16.

The network 16 typically comprises coaxial cable or optical fiber 18, extending from the head-end 12 to distribution nodes 20 within various neighborhoods. From the distribution nodes, further cables 22 couple to individual subscriber premises.

As detailed in the companion application entitled Proxy for Video on Demand Server Control, filed herewith, the network can include one or more proxy servers 24. These are computers interposed between the head-end 12 and the client terminals 14 to perform various system control and user interface (UI) functions.

The proxy server 24 is interposed in a logical TCP/IP control channel 27 between the head-end and clients. While the control signals and the entertainment are physically conveyed on the same cable 18, they are shown separately in Fig. 1 for conceptual clarity.

As shown in Fig. 2, the entertainment head-end 12 includes the components typically associated with a cable television head-end installation, e.g. satellite receivers 26 for receiving satellite broadcasts and producing corresponding baseband analog video signals. Additionally, head-end 12 includes fast digital disk arrays and/or optical storage 28 for storage of MPEG-encoded digital video for on-demand delivery. Head-end 12 also includes one or more interactive services servers 30, which output HTML-based programming (e.g. customized news, celebrity chat, interactive jukebox, and interactive games), as further detailed below. In systems not employing proxy servers 24, the head-end additionally includes a control computer 32 that receives and transmits control data relating to system administration (e.g. channel assignment data, billing information, etc.).

The transmission of these various forms of data from the head-end over the network 16 is straightforward. As is familiar to those skilled in the video arts, the analog video is commonly distributed on 6 MHz channels, beginning at 52 MHz and extending upwardly. The digital video can be encoded on a carrier for transmission within one of these conventional broadcast channels, or can be modulated at one or more other un-used frequencies. Statistical multiplexing is desirably employed to transmit plural channels of digitized video with reduced bandwidth. The HTML-based interactive services and the control data can be transmitted using a conventional protocol (e.g. TCP/IP) and modulated onto a suitable carrier frequency for distribution over the network. Or such data can be transmitted in the vertical blanking interval of analog video broadcasts, as is well known.

After modulation to appropriate distribution frequencies by modulators 34, the various signals from the head-end are combined by an RF combiner 36 for distribution over the network 16.

Each client terminal 14 is an enhanced WebTV terminal that includes a CPU 38, RAM memory 40, non-volatile memory 42, a display screen 44, display driver circuitry 46, a speaker 48 with an associated audio stage 50, a remote control 52, an infrared interface 54, a user interface (UI) 56, a dial-up interface 58, a cable interface 60, and an MPEG decoder 62 (Fig. 3). (The artisan is presumed familiar with WebTV terminals from their many descriptions in the patent and technical literature, and their widespread availability/use.)

The CPU 38 can be any of several microprocessors, e.g. those available from Intel, AMD, Cyrix, Motorola, etc. Alternatively, the CPU can be a custom device that optionally integrates one or more of the other components of terminal 14.

The RAM memory 40 typically comprises 8 or 16K of EDO memory, but more or less memory, and/or memory of differing type, can alternatively be used.

The non-volatile memory 42 in the illustrated embodiment includes a ROM, EEPROM, or flash memory in which certain components of the operating system and applications software are stored. Additionally, the illustrated non-volatile memory 42 includes 4GB of magnetic disk storage.

Display screen 44 is a CRT of the type conventionally used in consumer televisions, and display driver circuitry 46 serves to provide the excitation signals needed by the CRT, in accordance with input video data provided thereto.

Speaker 48 and audio stage 50 are the audio counterparts to the video display screen and driver circuitry. Desirably, these stages comprise high fidelity speakers and a suitable amplifier, together with audio-synthesis circuitry corresponding to the digital data format by which audio data is transmitted. (For the JUKEBOX service, detailed below, the audio may be transmitted in the MPC3 format, in which case the MPEG decoder 62 may be employed for decoding.)

Remote control 52, and corresponding IR interface 54, are generally conventional, and serve to relay user commands to the terminal in accordance with user manipulation of buttons on the remote control 52.

The dial-up interface 58 in the illustrated embodiment is a modem, coupled to a telephone line. Various different modems and communication links can be used.

The cable interface 60 receives composite data signals from the network 16 and separates them into three general signal types: analog video (typically corresponding to broadcast television programming), digital video (typically corresponding to on-demand video programming), and HTML/control instructions (the former typically corresponding to other interactive services, the latter being instructions exchanged between the client terminal 14 and the head-end 12, a proxy server 24, or a neighborhood node 20). Included in the cable interface 60 is an RF

- 4 -

tuner section controlled by the CPU. The illustrated MPEG decoder 62 is an application-specific integrated circuit that converts the MPEG video stream into successive frames of video data.

5 The user interface 56 in the illustrated embodiment refers to various on-screen visual displays through which -- in conjunction with the remote control 52 -- the user can effect various choices. One of these is switching viewing channels. (As detailed below, switching viewing channels does not necessarily effect a corresponding retuning of the RF tuner portion of the cable interface 60.) Although illustrated separately for clarity, those skilled in the art will understand that the user interface 56
10 is typically realized as instructions stored in RAM memory 40

The operation of the system is first described with reference to the video-on-demand service. To view an on-demand video, the user first tunes the client terminal 14 to a predetermined channel, the "VIDEO channel."

Here a distinction should be drawn between two types of "channels." The
15 first, termed a "transmission channel," refers to an actual frequency channel (e.g. 52 - 58 MHz) that is used to relay programming from the head-end 12 to the client terminal 14 over the network 16. The second, termed a "viewer channel," refers to the moniker (e.g. MSNBC, CNN, GAME, CHAT, VIDEO, FAVORITES) by which a user distinguishes different programming. The mapping between viewer and transmission
20 channels is determined by the system (e.g. by the terminal 14, the head-end 12, or a proxy server 24).

The VIDEO channel is a viewer channel -- it is the channel to which the viewer switches to receive video on demand programming. The frequency over which this programming is delivered is not important to the viewer. Different transmission
25 channels may be available for use at different times, depending system resource usage (e.g. other viewers' video-on-demand usage). One day the 108-114 MHz transmission channel might be used to relay on-demand video to a subscriber. The next day, the 114-120 MHz transmission channel might be used instead. Data indicating the assignment of transmission channels-to-viewer channels is periodically relayed as
30 control data among the components of the system 10.

On the VIDEO channel, the user is presented an introductory UI screen 64 of the sort shown in Fig. 4. This screen includes four components: a topical listing of movie categories 66; a feature 68 permitting the user to search a database of available videos by title, actor, director, keywords, etc; a promotion 70 of one of more featured
35 video titles; and other advertising 72. This screen is defined by HTML primitives sent over the network 16, as rendered by the client terminal 14. In the illustrated

embodiment, the HTML primitives associated with the video selection screen 64 are sent from the proxy server 24.

5 The viewer manipulates arrow keys on the remote control 52 to highlight the feature of interest, e.g. a particular topical category. (Highlighting here refers to a visual indicia showing that a particular screen feature, or hyperlink, has been selected for execution. Various forms of highlighting can be used, e.g. a change in color of the feature, a colored box surrounding the feature, etc.) After a desired feature has been selected, a "Go" button on the remote control is pressed, signaling the user's selection to the terminal 14.

10 If the "KIDS" category was highlighted, the system next presents a screen listing available children's movies (again defined by HTML from the proxy server). Again, the viewer manipulates the remote control to select a particular choice, and then presses "Go." At this point, an optional screen can be presented confirming billing arrangements (if any).

15 Once a final video selection has been made, a video control panel UI 74 (Fig. 5) is presented on the screen. In the illustrated embodiment, this panel is translucent, permitting the viewer to perceive imagery "behind" the overlaid panel. (That is, the panel is rendered as a change in luminance of the underlying imagery.) The exemplary video control panel 74 of Fig. 5 includes PLAY, STOP, REWIND, FAST FORWARD, and
20 PAUSE buttons 76A-E. (Additionally, the panel can have a textual or graphical indication 78 of the time remaining in the selected video.) The PLAY button is initially highlighted.

While the control panel is being rendered at the client (from HTML primitives stored in the non-volatile memory 42), the head-end queues the selected MPEG video
25 for playback, and the system (either the head-end 12 or a proxy server 24) selects an available transmission channel. Data indicating the selected channel is relayed to the client terminal 14, which tunes the RF tuner in the cable interface 60 without any user action. The viewer channel, in contrast, remains unchanged at the VIDEO channel.

To play the selected video, the user simply presses the "Go" button on the
30 remote control 52, activating the initially-highlighted PLAY button 76A on the control panel 74. A corresponding instruction is sent to the head-end 12, and video delivery commences. The on-screen video control panel 74 disappears.

If, during playback, the user wishes to stop or pause delivery of the on-demand video (e.g. to answer the telephone, or get a snack from the kitchen), a "Menu"
35 button on the remote control is pressed. The video control panel 74 reappears, this time with the STOP button highlighted. If the user wishes to stop playback, the "Go" button on the remote is pressed. If the user wishes to pause playback, the

highlighting on the control panel is moved to the PAUSE button using arrow keys on the remote control, and the "Go" button is then pressed. A corresponding stop or pause instruction is then sent to the head-end 12 from the client terminal 14, interrupting MPEG delivery.

- 5 A data record is stored -- either at the client, at the head-end, or at a proxy server -- indicating the point of video interruption (e.g. by SMPTE code, disk address, time offset, etc.) so that playback can be resumed from that point (or shortly before that point, to provide context).

- 10 When either the STOP or PAUSE button is activated on the panel 74, the panel 74 persists on the screen, but the highlighting is switched back to PLAY. (If the PAUSE button is used to resume playback following a pause instruction, and the user activates the PAUSE button to interrupt the video, the highlighting can remain at the PAUSE button.) This arrangement permits the viewer to resume playback simply by pressing "Go" on the remote, since the button that resumes playback is already
- 15 highlighted. (The panel similarly persists on-screen if the REWIND or FAST FORWARD buttons is activated, with PLAY next highlighted.)

- The screen can be put to various uses while the video is interrupted. Examples include presentation of quizzes and other entertainment to viewers who may still be in the viewing room. An indication of waiting email, or commercial or promotional
- 20 messages, can similarly be presented.

- If the stop in playback is brief, the system 10 maintains the assignment of the transmission channel to that video on demand client 14, despite the interruption in video delivery. However, if the interruption period exceeds a threshold value (e.g. ten minutes), the system returns the assigned transmission channel back to the system's
- 25 pool of available transmission channels. The channel may then be assigned to another use. If the user thereafter resumes playback by pressing "Go" on the remote (PLAY was already highlighted), the system responds by dynamically assigning a new transmission channel, retuning the client's RF tuner and the head-end's modulator accordingly, and resuming playback from (or just before) the point of interruption.

- 30 A similar sequence occurs if the user changes to another viewer channel during playback of an on-demand video (e.g. changing to MSNBC to check a sports score). The system interrupts delivery of the on-demand video (e.g. in response to an instruction or notification sent by the client), and a record indicating the point of MPEG interruption is stored. If the user returns to the VIDEO viewer channel within a
- 35 predetermined period (e.g. 24 hours), the system resumes transmission of the video from the point of interruption. (No user action, e.g. pressing PLAY, is required -- no video control panel is presented in this scenario.) Again, the resumed transmission

may occur over a different transmission channel, but this detail is transparent to the user.

The illustrated system includes an electronic program guide that can be selectively displayed on-screen to facilitate viewer program selection. Electronic program guides are familiar to those skilled in the art, so are not belabored here. Exemplary program guides are shown, e.g., in U.S. Patents and allowed applications 5,815,575, 5,758,258, 5,585,838, 5,654,748, 5,526,036, 08/969,979 and 08/968,386. Desirably, when an on-demand video is selected, the title of the video appears in the electronic program guide, in association with the VIDEO viewer channel. Additionally, an indication of the time-remaining in the selected video can also be displayed, e.g. as a numeric hour:minute representation, or as a block that extends in a gridded program guide for a distance corresponding to the remaining time. (Data specifying the selected video title and the remaining time is stored in one or more of the components of system 10 and can be inserted into the program guide as appropriate.)

This listing of an on-demand video amidst broadcast television programming in an electronic program guide contributes to user perception of on-demand video as just another channel. It is desirable to present all video services in this television-like paradigm so as to present a seamless, familiar experience to new users.

Providing a television-like interaction for on-demand video is one thing; extending that experience to HTML-based video services is another. In the following discussion, several different HTML-based services are described. Various techniques are employed in such services to contribute to a television-like experience.

One technique is to make the screen look like a television screen. Computer displays typically have an image area bounded by straight edges. Since the edge of the CRT tube is typically not straight but is slightly curved, there is commonly a thin black margin at some or all of the edges of computer monitors. The display does not extend into this marginal area lest it render another part of the image off-screen. Television displays, in contrast, are not so concerned with rendering accuracy. Instead, the emphasis is on providing the largest apparent image size. Accordingly, the screen is typically overscanned -- with at least certain scan line ends extending beyond the visible portion of the screen. Accordingly, one technique to yield a more television-like experience when displaying HTML-rendered graphics is to deliberately overscan the screen.

A related technique is to avoid displays that are larger than the viewing screen. Many "pages" on the world wide web require "scrolling" to view portions extending off the bottom of the screen. While this is a familiar operation for web-surfers, it is wholly foreign to television viewers and is desirably avoided.

Another technique for enhancing the television-like appearance of HTML graphics is to employ production techniques and values evocative of television programming. For example, fades, dissolves, and wipes are video transition effects that viewers routinely encounter in television programming. However, they are used rarely -- if at all -- in HTML productions. Their use in the interactive services detailed below contributes to a television-like experience.

Yet another integrating technique is to list the interactive services (e.g. GAMES, CELEBRITY CHAT, JUKEBOX, NEWS) in the system's electronic program guide simply as additional channels, amidst the other channels familiar to viewers (e.g. network broadcast channels and cable channels).

By techniques such as these, viewers encounter interactive video entertainment and conventional television programming in a seamless, familiar context. This is important because, as will be evident from the following discussion, interactive video entertainment itself can be quite different from conventional TV.

Interactive entertainment encompasses a wide range of content. Some forms have antecedents in other contexts or media. Other forms are wholly new. A few examples will serve to illustrate the wide range of possibilities.

A first exemplary interactive video service is a jukebox. When a user first switches to the JUKEBOX viewer channel, a user interface akin to the video selection UI 74 is presented on-screen. However, instead of permitting selection of movies, it permits selection of music (e.g. by genre, artist, title, etc.). Selected music can then be played through the terminal's audio speakers 48 using similar procedures and playback UI as detailed earlier for playback of on-demand video. As before, if the user switches away from the JUKEBOX viewer channel, playback of the selected audio is interrupted and a pointer is stored indicating the point at which the selection should be resumed.

During playback, rather than let the display screen 44 sit idle, it is desirably used in conjunction with the selected music. It may, for example, present a music video to accompany the selected audio recording. Or it may present information related to the selection, e.g. artist biography, critic reviews, listings of other recordings of the same selection by different artists, the artist's upcoming concert schedule, etc. It may also allow the user to purchase the music, whether on CD or otherwise. (All such options can be hot-linked to other screens of HTML data, as is conventional on the world wide web.)

Desirably, the system monitors the user's musical selections, and automatically compiles a profile of the user's preferences (e.g. by genre, artist, etc.). Alternatively, the user can explicitly define his or her preferences. (As with other data stored in

distributed system 10, the user's jukebox preferences can be stored in the client terminal, at a proxy server, or at the head-end, or distributed therebetween.) When the user thereafter returns to the JUKEBOX viewer channel, a selection menu configured to focus on these preferences can be presented. (The focused selection menu also includes the option of returning to the general, all-encompassing music selection screen.)

A second exemplary interactive service is NEWS. This viewer channel delivers personalized news information in a television-like format. The channel is organized like CNN Headline News, with a small number of news categories that are continuously cycled-through several times an hour. Categories can include, e.g., headlines, sports, weather, traffic, and financial. The presentations in each category can be static (e.g. text articles), but more typically include streaming video excerpts.

An exemplary presentation of NEWS is shown in Fig. 6. In addition to showing part of the current Headline category, the screen 80 gives the user the option of switching immediately to any other category (sports, weather, or stocks in the illustrated screen). Again, such selection is made by the user with arrow keys on the remote control, by moving highlighting to the desired choice and pressing the "Go" button.

As with the JUKEBOX channel, the NEWS channel allows the viewer to define and store personal news preferences (e.g. a selected ticker of stock prices, Chicago Cubs news, weather for Chicago, etc.). If local client disk storage permits, all news is downloaded and stored, in a FIFO basis, in disk storage allocated thereto. This locally-stored news is then filtered in accordance with the viewer's preferences for display. This arrangement allows the user to change preferences and apply the new preferences to recently downloaded news.

As in the earlier-described embodiments, state data indicating the status of the NEWS channel can be stored whenever the user switches to another viewer channel, so that the NEWS channel can resume at the point of interruption.

A third illustrated interactive channel is CELEBRITY CHAT. This viewer channel presents different celebrities with which participants can chat in a moderated dialog. The celebrities are scheduled at specific times, much like conventional TV talks shows.

In the illustrated arrangement, viewers compose typed questions on a keyboard optionally provided with the client terminal, and send them e-mail fashion to a moderator of the CELEBRITY CHAT channel. The moderator (human or automated) selects questions of widespread appeal and poses them to the celebrity. The posed questions, and the celebrity's responses, are distributed to all viewers of the CELEBRITY CHAT channel over the cable network. (By this arrangement, the dial-up

- 10 -

telephone link is activated only briefly -- when the user-composed question is emailed to the moderator -- saving dial-up charges.)

A user interface 82 associated with the CELEBRITY CHAT channel is shown in Fig. 7. In this embodiment, the chat is presented in typed form. (In other
5 embodiments, of course, streaming audio/video can be employed to present the moderator and the celebrity in their dialog. This can be supplemented by other textual or multi-media presentations related to the celebrity, e.g. music video, movie clips, biographical data, etc.) At the bottom of the screen is an Ask Question feature 84
10 that can be activated (as before, with arrow keys and the "Go" button on the remote control) to permit entry of the e-mail question in a box 86. After typing the question, the user hits Return on the keyboard. This terminates entry of the question, and activates the dial-up connection through which the question is transmitted to the moderator. After the question has been transmitted, the dial-up link is automatically terminated. If the viewer's question is selected by the moderator, it will eventually
15 appear in the typed transcript of the interview -- together with the celebrity's response.

Due to the involvement of other viewers in the CELEBRITY CHAT channel, it is difficult to suspend the state of the channel if the viewer switches to another channel and later returns. In the illustrated embodiment, a viewer returning to the CELEBRITY
20 CHAT channel sees only the last screenful of question-and-answer dialog.

A fourth interactive channel is GAMES. A viewer tuning to this channel is presented with a menu of game options -- typically topically arranged. Some games are single player. Other games involve a community of players who are participating in the game. The latter are typically scheduled at prearranged times like television
25 programs (e.g. Dungeons and Dragons, 9:00 p.m. every evening).

Contests and tournaments can be conducted on the GAMES channel, with sponsors awarding prizes (e.g. a free month of WebTV) to high-scorers -- either of a single session or over a given period (e.g. a month).

Some games may require execution of software applets on the client terminals,
30 rather than just the rendering of HTML primitives. Such software can be downloaded to the terminal as necessary, or just in advance of scheduled multi-player games. Since some games require relatively large blocks of instructions or data on relatively short notice (depending on the turn of events in the game), same is desirably downloaded in anticipation of likely use, rather than when needed.

35 If the selected game is of the single-player variety, then state data memorializing the status of the game can be stored if the viewer turns to another channel. When the viewer thereafter returns to the GAMES channel, the game can be

resumed at the point of interruption. (Again, due to the involvement of other participants in multi-player games, it is generally impractical to try and permit the viewer to resume an interrupted multi-player game at the point of interruption.)

5 A further feature of the illustrated client terminal is to automatically record favorite broadcast television programs. The client monitors the user's viewing habits to determine favorite shows (e.g. StarTrek Voyager, Wednesdays, 6:00 p.m., viewer channel FOX). Thereafter, if the terminal is not activated by the user to watch one of these favorites, the terminal notices the event and automatically copies the program onto disk, to the extent storage space permits. (MPEG compression -- either software-based, or employing a dedicated MPEG compressor ASIC -- is typically employed.) This
10 stored program is then listed by title and length in the electronic program guide, as available for viewing on the FAVORITES channel. If the viewer switches to this channel, the recorded program is played back automatically. The playback UI of Fig. 5 is selectively presented (e.g. by pressing the Menu button on the remote control) to
15 allow the viewer to control playback. If several favorite programs have been stored, the viewer is first presented with a menu screen on the FAVORITES channel by which the desired program can be selected.

Recorded programs are not deleted after viewing. However, their storage space may be overwritten by other recordings. Recorded programs that have not been
20 viewed are overwritten as needed, oldest first. Viewed programs are overwritten before non-viewed programs. (Programming implementing a variety of more complex rules and policies is typically provided to govern which recorded programs are deleted to provide storage for new programs.)

Video storage at the client terminal also permits a viewer to take a break from
25 broadcast programming without missing anything (as would otherwise occur). When a viewer wants to take a break, a Delay Program button is selected from an Options menu that is controllably presented on the screen in response to a button on the remote control. When the Delay Program button is activated, the then-tuned program is routed to the MPEG compressor and copied to disk. When the viewer thereafter
30 returns, the viewer activates a Resume Program button on the Options menu. Copying of the incoming broadcast continues, but simultaneous playback of the earlier recorded portion commences and is displayed on the screen. The disk thus acts as a circular buffer.

Yet another feature of the illustrated embodiment is an arrangement by which
35 the system can suggest programming that may be enjoyed by different users. The system compiles profiles of each user's viewing habits (e.g. Viewer A's favorite shows appear to be (a) 60 Minutes, (b) StarTrek Voyager, and (c) Dharma and Greg; the

profile includes less-frequently viewed programs as well). Each such profile is correlated with other viewers' profiles to find affinity groupings of users with similar profiles. Viewing suggestions can then be made based on the system's determination of other programming that is popular among other members of the group. For example, from an analysis of the profiles of viewers most closely correlated with Viewer A, the system may note that a significant number also watches Third Rock From the Sun. System records may show that Viewer A has never watched this program and the system may thus propose (either in response to a viewer's query or autonomously) that Viewer A may enjoy Third Rock From the Sun.

Desirably, the profiles are based on more than a single favorite program for each viewer. Although a single favorite program could serve as the basis for affinity grouping, this is generally too clumsy a metric (e.g. many viewers of Seinfeld have otherwise divergent viewing preferences).

The profiles need not be based on favorite programming alone. Many other factors can be considered in forming affinity groupings, e.g. time-of-day viewing habits, zip code, game/chat/interactive news/jukebox preferences/habits, etc.

From the foregoing it will be recognized that the illustrated system redresses many shortcomings of the prior art, and provides a great number of features not previously available.

Having described and illustrated the principles of our invention with reference to a preferred embodiment and various alternatives, it should be apparent that the invention is not limited to the detailed arrangements.

For example, while the disclosure particularly considered use of visual user-interfaces, many of the principles detailed above can be applied equally-well to user interfaces employing other techniques, e.g. gesture-interfaces, audio interfaces, tactile interfaces, etc.

Similarly, while the detailed embodiment employed certain UI conventions (e.g. the video control panel disappears after PLAY is activated), other embodiments can employ other UI conventions (e.g. the control panel persists, or is minimized, or becomes more transparent, etc.)

Several references were made to HTML. This term is meant to include not just Hypertext Markup Language per se, but also to encompass other graphical and/or video representation systems by which primitives can be combined to yield desired static or moving displays.

The illustrated embodiment employed a wired link to the interactive network, but other distribution arrangements (e.g. direct satellite broadcast, with telephone return channel) can likewise be used. Similarly, the dial-up link is not exclusive; other

arrangements (e.g. MetroCOM, etc.) can be used, depending on the needs of the particular application.

Moreover, even a "wired" link to the interactive network needn't be of the sort particularly illustrated. With enhanced compression techniques and delivery technologies, other arrangements -- including plain old telephone service -- can alternatively be employed.

To provide a comprehensive disclosure without unduly lengthening this specification, applicants incorporate by reference the disclosure of patent 5,648,824, which discloses additional details related to video-on-demand systems and related user interfaces.

While the foregoing discussion has detailed a complete system, it employs many inventive concepts -- each of which is believed patentable apart from the system as a whole.

In view of the many different embodiments to which the above-described inventive concepts may be applied, it should be recognized that the detailed embodiments are illustrative only and should not be taken as limiting the scope of our invention. Rather, we claim as our invention all such modifications as come within the scope and spirit of the following claims, and equivalents thereto.

WE CLAIM:

1. A method of presenting video entertainment comprising:
defining plural viewing channels;
on certain of said channels, providing television programs;
5 on at least one of said channels, providing interactive video entertainment, said
interactive video entertainment comprising at least one of the following: interactive
news, interactive celebrity chat, an interactive game, or an interactive jukebox;
wherein a subscriber encounters television programming and interactive video
entertainment in a seamless context.
10
2. The method of claim 1 wherein the interactive video entertainment
comprises interactive news.
3. The method of claim 1 wherein the interactive video entertainment
15 comprises interactive celebrity chat.
4. The method of claim 1 wherein the interactive video entertainment
comprises an interactive game.
- 20 5. The method of claim 1 wherein the interactive video entertainment
comprises an interactive jukebox.
6. The method of claim 1 wherein the interactive video entertainment
comprises at least two of the above-listed options.
25
7. The method of claim 1 wherein the interactive video entertainment
comprises at least three of the above-listed options.
8. The method of claim 1 wherein the interactive video entertainment
30 comprises all four of the above-listed options.
9. The method of claim 1 wherein the interactive video entertainment also
includes on-demand video.
- 35 10. The method of claim 1 wherein said providing of interactive video
entertainment includes rendering HTML instructions.

11. The method of claim 10 which includes presenting the rendered HTML instructions full-screen on a display device, wherein a television-like context of the video entertainment is not disrupted by a need to scroll up or down the screen to view the entirety of the video entertainment.

5

12. The method of claim 1 which includes composing the interactive video entertainment to include at least one television special effect selected from the group consisting of: dissolves, fades, and wipes, wherein the interactive video entertainment has production values evocative of television programming.

10

13. A method of presenting video entertainment comprising:
defining plural viewing channels;
on certain of said channels, providing television programs;
on at least one of said channels, providing interactive video entertainment
defined, at least in part, by HTML instructions, said interactive video entertainment
including at least one television special effect selected from the group consisting of:
dissolves, fades, and wipes, wherein the interactive video entertainment has
production values evocative of television programming.

15

20

14. The method of claim 13 which includes presenting said interactive video entertainment on a viewing screen, wherein the interactive video entertainment is displayed into an overscan area on the screen, the interactive video entertainment thereby appearing more like television programming.

25

15. The method of claim 13 which includes presenting said interactive video entertainment on a viewing screen, wherein rendering of said HTML instructions yields a full screen display, without the need for user scrolling to view any portion of the display.

30

16. A method of presenting video entertainment comprising:
defining plural viewing channels;
on certain of said channels, providing television programs;
on at least one of said channels, providing interactive video entertainment, said entertainment including HTML primitives to be rendered by a client terminal;

35

when switching away from an interactive video entertainment channel, storing state information associated with said interactive video entertainment channel; and

when thereafter switching back to said interactive video entertainment channel, restoring said state information;

wherein a user can easily resume an earlier-commenced activity on said interactive video entertainment channel.

5

17. The method of claim 16 which includes transmitting the interactive video entertainment on a first transmission channel prior to said switching away, and transmitting the interactive video entertainment on a second, different transmission channel after said switching back.

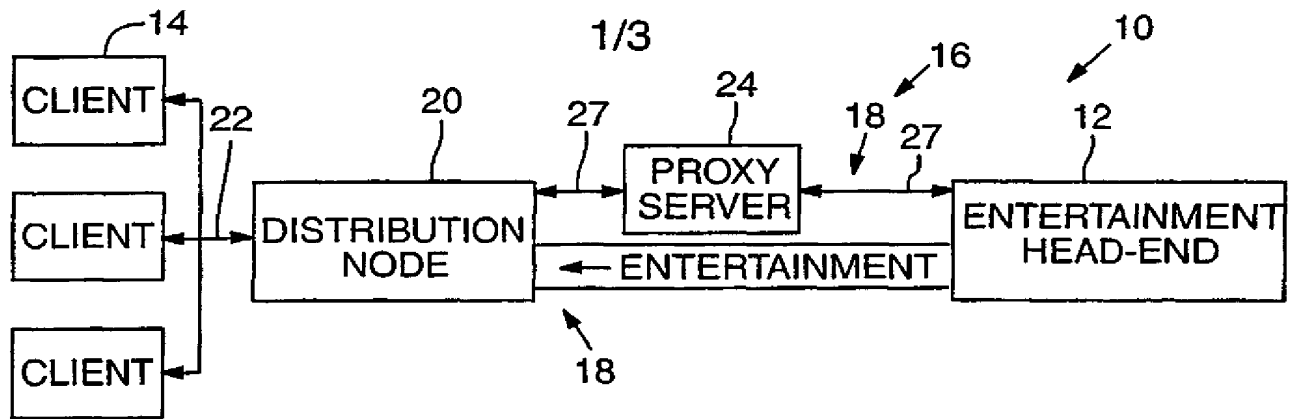


FIG. 1






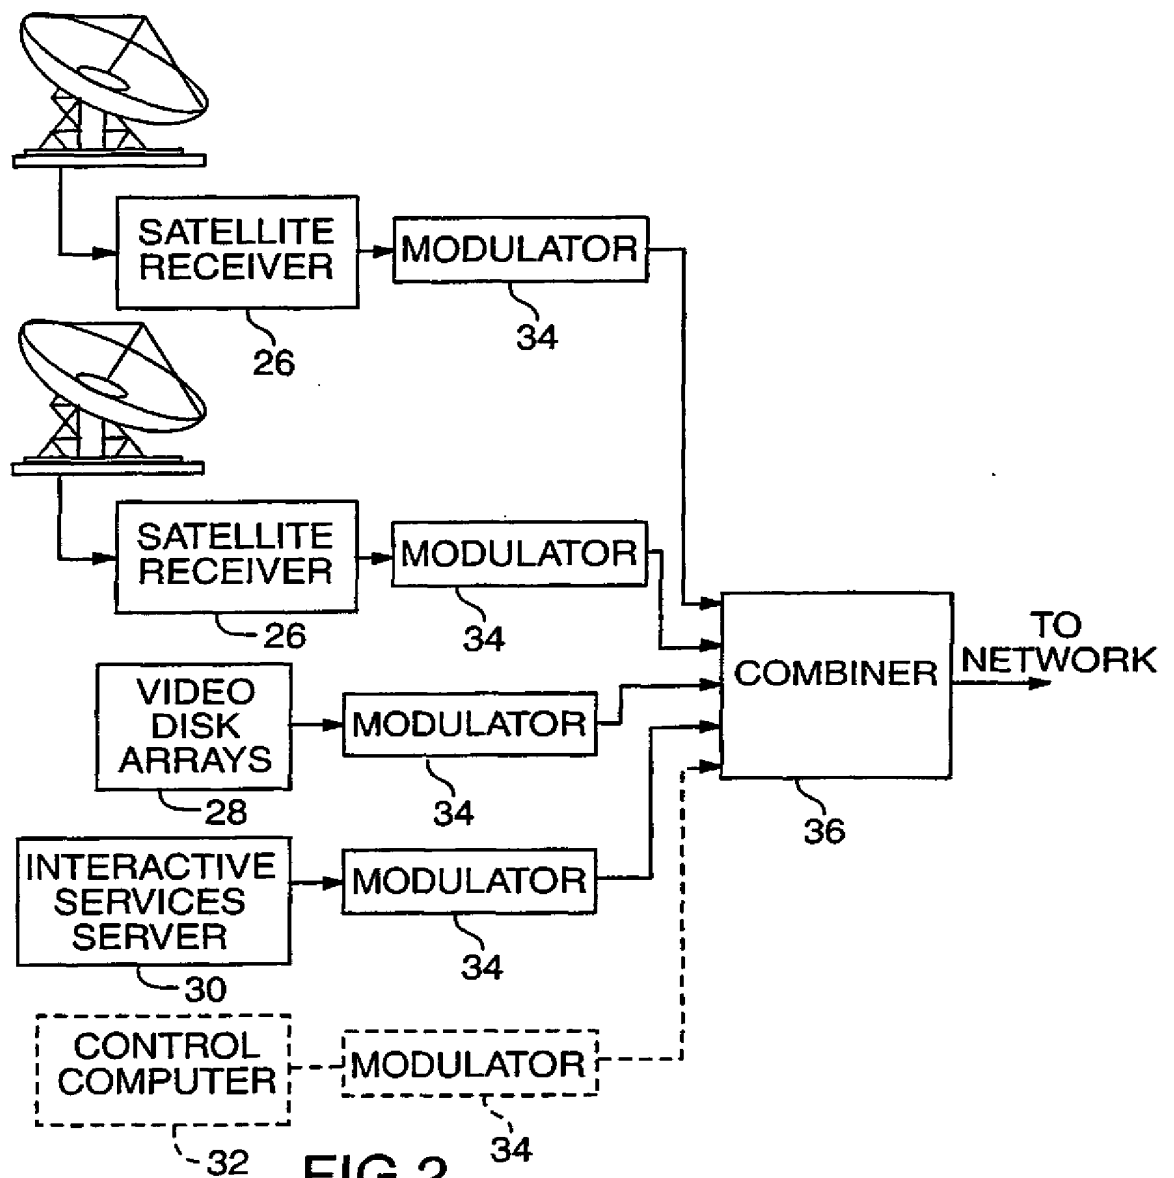


FIG. 2

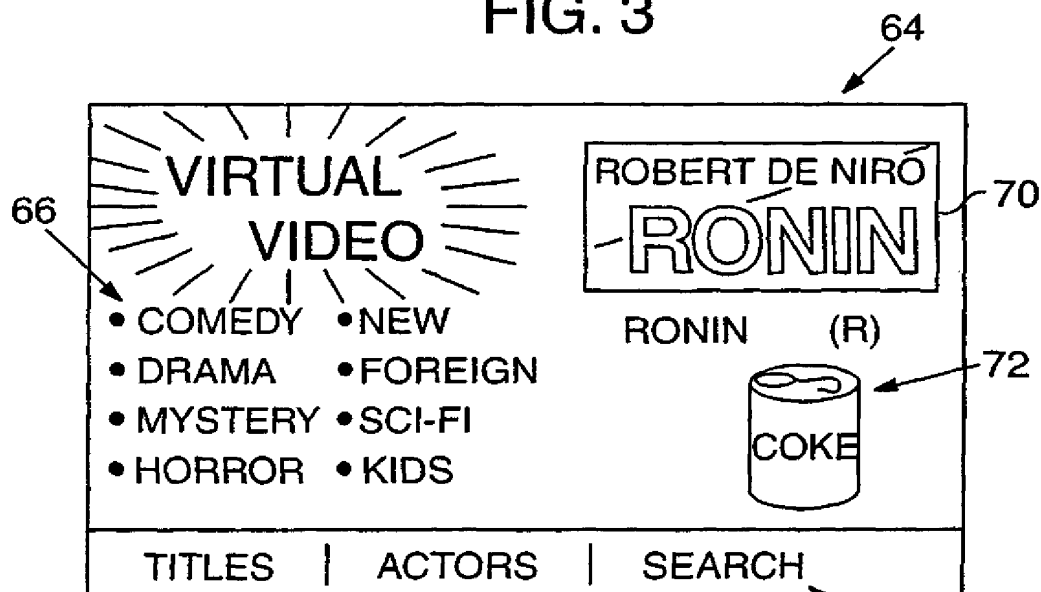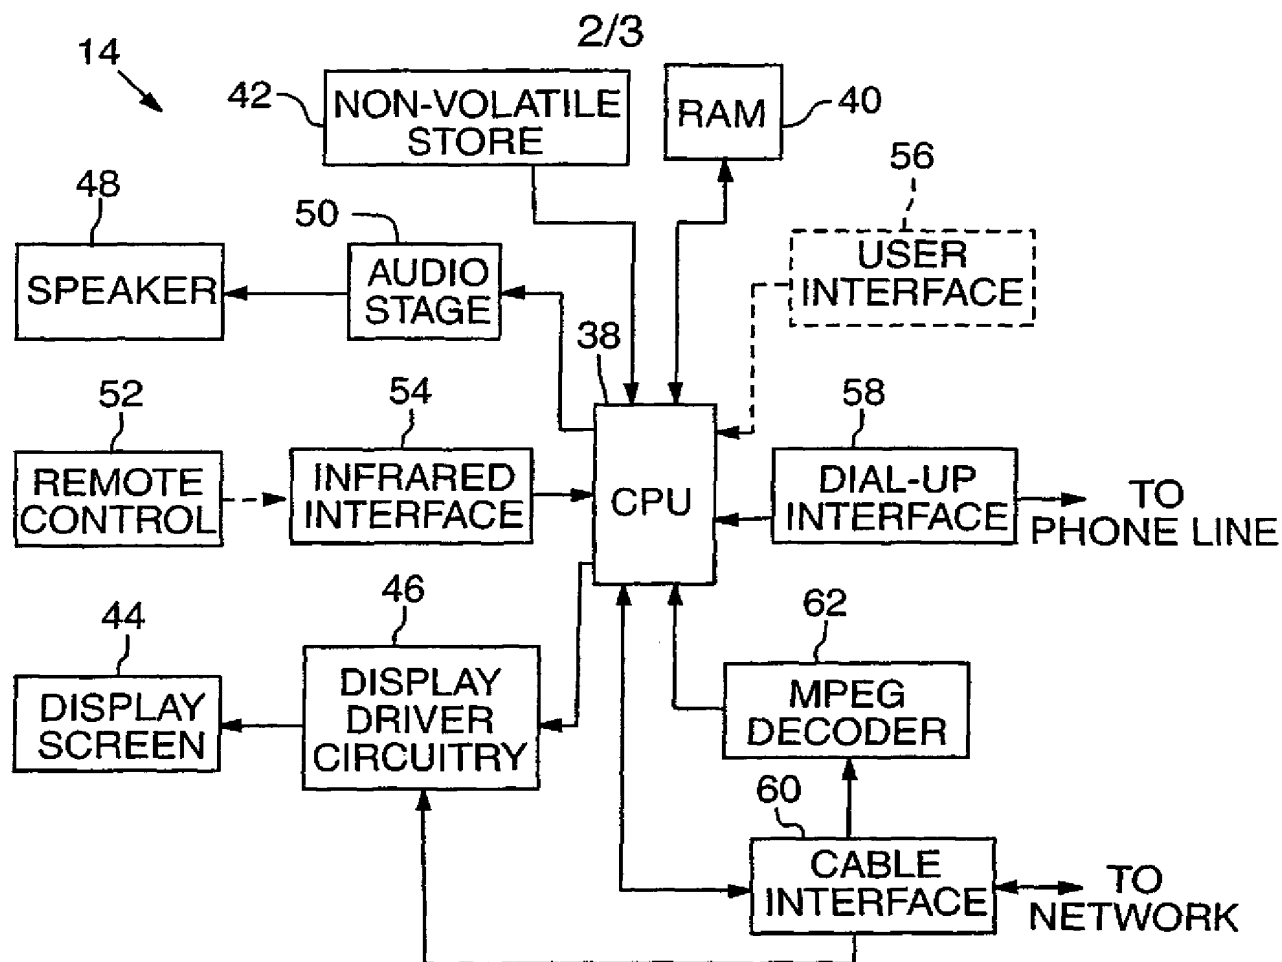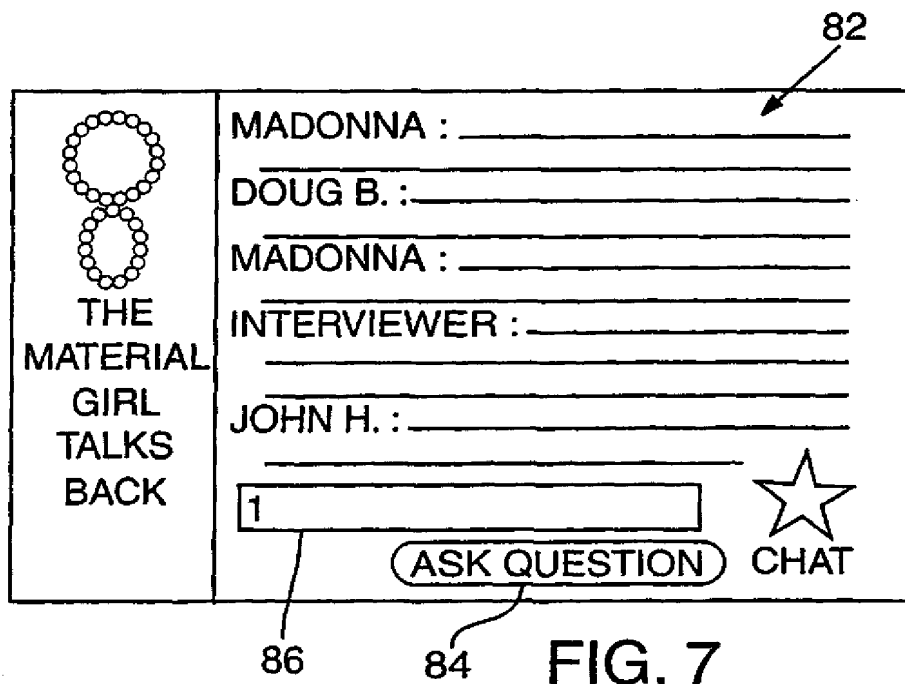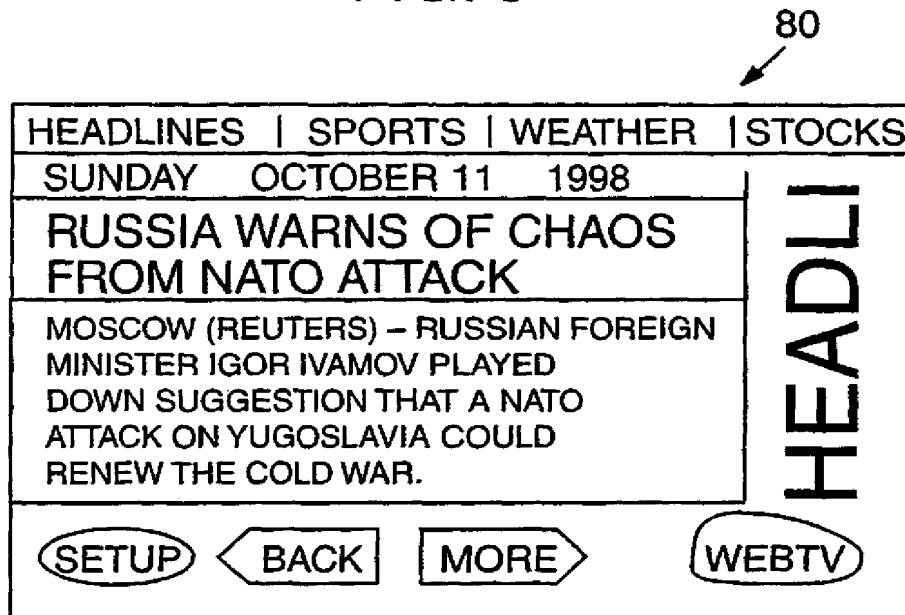

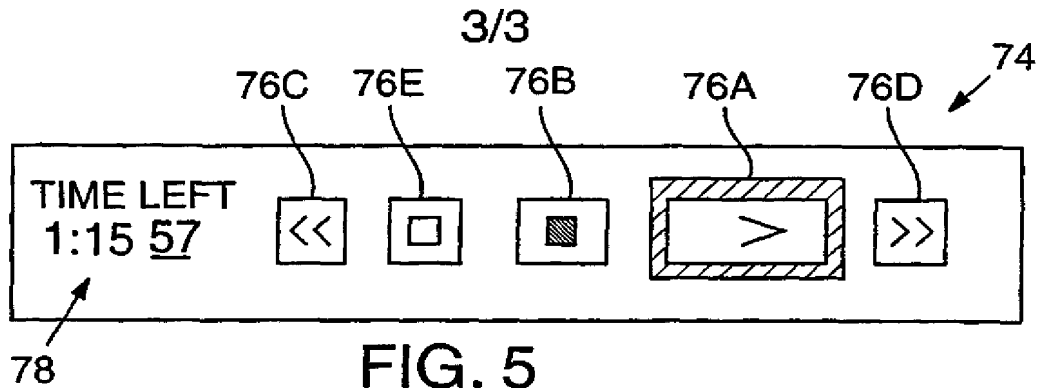

INTERNATIONAL SEARCH REPORT

Intern. Application No.

PCT/US 99/28399

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04N7/173

According to international Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	US 5 589 945 A (ABECASSIS MAX) 31 December 1996 (1996-12-31) column 3, line 46 -column 6, line 44	1, 13, 16 2-12, 14, 15, 17
Y A	WO 92 10040 A (SCIENTIFIC ATLANTA) 11 June 1992 (1992-06-11) page 6, line 21 -page 17, line 8	1, 13, 16 2-12, 14, 15, 17
A	US 5 526 035 A (LAPPINGTON JOHN P ET AL) 11 June 1996 (1996-06-11)	1-17
A	WO 96 17467 A (HERZ FREDERICK ;UNGAR LYLE (US); WACHOB DAVID (US); ZHANG JIAN (US) 6 June 1996 (1996-06-06) page 7, line 10 -page 14, line 34	1-17
	-/-	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

21 February 2000

Date of mailing of the international search report

28/02/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3018

Authorized officer

Greve, M

INTERNATIONAL SEARCH REPORT

Intern al Application No

PCT/US 99/28399

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 619 249 A (MARTIN ROBERT I M ET AL) 8 April 1997 (1997-04-08) column 9, line 22 -column 11, line 20	1-17
A	EP 0 852 443 A (TEXAS INSTRUMENTS INC) 8 July 1998 (1998-07-08) the whole document	1-17
A	US 5 550 578 A (HOARTY W LEO ET AL) 27 August 1996 (1996-08-27) abstract	1-17
A	US 5 534 941 A (SIE JOHN J ET AL) 9 July 1996 (1996-07-09) the whole document	1-17

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No.

PCT/US 99/28399

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5589945	A	31-12-1996	US 5434678 A	18-07-1995
			US 5684918 A	04-11-1997
			US 5664046 A	02-09-1997
			US 5634849 A	03-06-1997
			US 5610653 A	11-03-1997
			US 5953485 A	14-09-1999
			US 5987211 A	16-11-1999
			US 5913013 A	15-06-1999
WO 9210040	A	11-06-1992	US 5239540 A	24-08-1993
			AU 7570294 A	15-12-1994
			AU 650937 B	07-07-1994
			AU 9156991 A	25-06-1992
			CA 2097083 A,C	28-05-1992
			CN 1063006 A,B	22-07-1992
			CN 1117675 A	28-02-1996
			EP 0559831 A	15-09-1993
			FI 932402 A	20-07-1993
			JP 6503214 T	07-04-1994
			US 5406558 A	11-04-1995
			US 5455570 A	03-10-1995
			US 5675575 A	07-10-1997
			US 5282028 A	25-01-1994
			US 5287351 A	15-02-1994
US 5526035	A	11-06-1996	US 5343239 A	30-08-1994
			AU 661082 B	13-07-1995
			AU 3063292 A	15-06-1993
			CA 2124000 A	27-05-1993
			EP 0613600 A	07-09-1994
			JP 7505020 T	01-06-1995
			WO 9310605 A	27-05-1993
			US 5734413 A	31-03-1998
			US 5519433 A	21-05-1996
			US 5764275 A	09-06-1998
			US 5638113 A	10-06-1997
WO 9617467	A	06-06-1996	US 5758257 A	26-05-1998
			AU 703247 B	25-03-1999
			AU 4410396 A	19-06-1996
			CA 2207868 A	06-06-1996
			EP 0796538 A	24-09-1997
			US 6020883 A	01-02-2000
			US 5734720 A	31-03-1998
			US 5754938 A	19-05-1998
			US 5754939 A	19-05-1998
			US 5835087 A	10-11-1998
US 5619249	A	08-04-1997	AU 685320 B	15-01-1998
			AU 3551695 A	29-03-1996
			CA 2199153 A	21-03-1996
			DE 69506571 D	21-01-1999
			DE 69506571 T	12-05-1999
			EP 0781489 A	02-07-1997
			ES 2126317 T	16-03-1999
			JP 10505976 T	09-06-1998
			WO 9608927 A	21-03-1996

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 99/28399

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0852443 A	08-07-1998	JP 10271484 A	09-10-1998
		SG 67468 A	21-09-1999
US 5550578 A	27-08-1996	US 5526034 A	11-06-1996
		US 5412720 A	02-05-1995
		US 5220420 A	15-06-1993
		US 5093718 A	03-03-1992
		US 5594507 A	14-01-1997
		US 5442700 A	15-08-1995
		US 5485197 A	16-01-1996
		US 5557316 A	17-09-1996
		US 5587734 A	24-12-1996
		US 5883661 A	16-03-1999
		EP 0638219 A	15-02-1995
		JP 7509817 T	26-10-1996
		WO 9322877 A	11-11-1993
		AU 643828 B	25-11-1993
		AU 8483891 A	02-04-1992
		CA 2052477 A,C	29-03-1992
		CN 1063593 A	12-08-1992
		CS 9102869 A	13-05-1992
		EP 0477786 A	01-04-1992
		FI 914552 A	29-03-1992
		HU 63287 A	28-07-1993
		IL 99586 A	22-02-1998
		JP 6022315 A	28-01-1994
		MX 9101308 A	04-05-1992
		NO 913772 A	30-03-1992
		NZ 239969 A	22-12-1994
		PL 291975 A	05-04-1993
		PT 99110 A	31-12-1993
		TR 25669 A	01-07-1995
		US 5361091 A	01-11-1994
		US 5319455 A	07-06-1993
		ZA 9107555 A	28-04-1993
US 5534941 A	09-07-1996	NONE	